


ERGONOMIC ASSEMBLY

ADJUSTABLE HEIGHT BENCH • PUSH BUTTON CONTROL • **ACTUATOR STYLE**

• 500-lb & 850-lb BENCH CAPACITY • DOUBLE COLUMN 10'-0" FRAMES

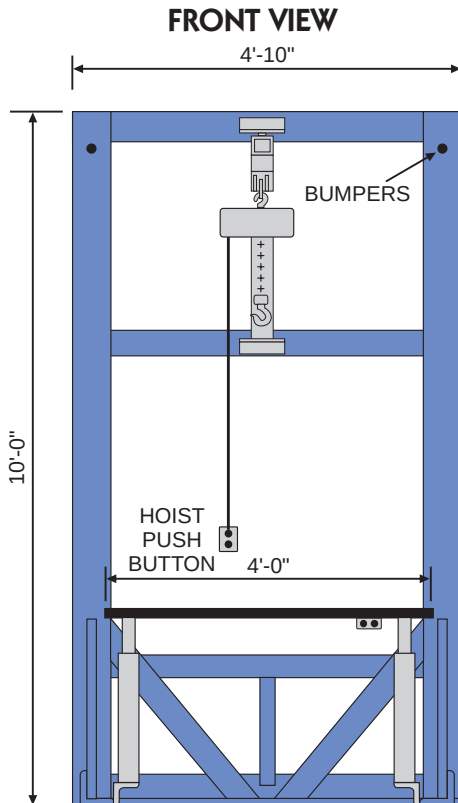

MODEL #100DC6-3X4A

- 100-lb jib capacity
- 500-lb bench capacity

MODEL #250DC6-3X4A

- 250-lb jib capacity
- 500-lb bench capacity


MODEL #500DC6-3X4A

- 500-lb jib capacity
- 850-lb bench capacity

MODEL #850DC6-3X4A

- 850-lb jib capacity
- 850-lb bench capacity

**NO SPECIAL FOOTING
IS REQUIRED**

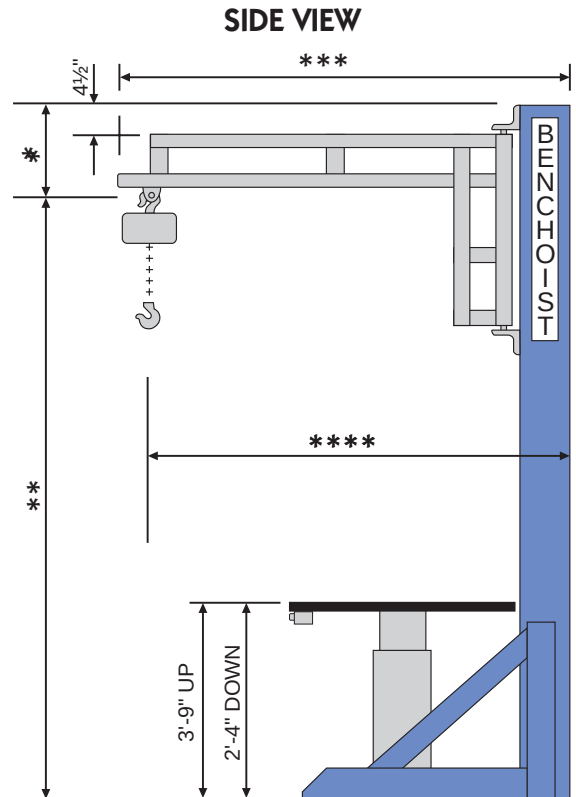


CAPACITY	*	**	***	****
100	1'-3 3/4"	8'-8 1/4"	6'-9"	6'-4"
250	1'-3 3/4"	8'-8 1/4"	6'-9"	6'-4"
500	1'-4 1/4"	8'-7 3/4"	6'-9"	6'-5 1/2"
850	1'-4 1/2"	8'-7 1/2"	6'-11"	6'-5"

STANDARD WITH ALL DC6-3X4A MODELS

- Standard headroom (10'-0") frames
- 6'-0" jib swivels 180°
- Rubber bumpers
- Easy-rolling push trolley
- 3'-0" x 4'-0" maple or steel top
- Effortless push button control
- Bench is complete with linear actuator with limit clutch & safety lock, 115 VAC, 3 AMP
- Bench travel speed is 1/2" per second for the 100-lb & 250-lb unit, and 1/4" per second for the 500-lb & 850-lb units
- Anchor bolts
- Welded construction

BASE DIMENSIONS AND ANCHOR BOLT LOCATIONS

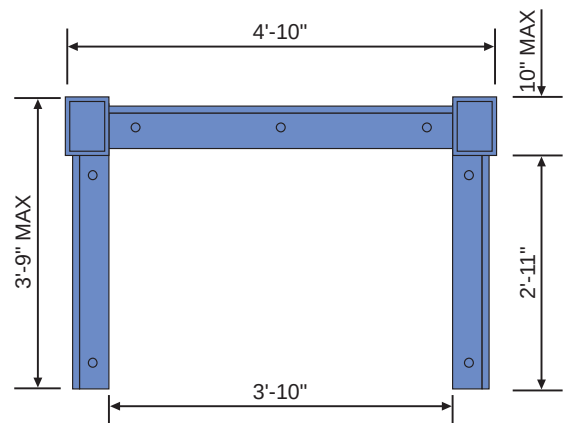

American Crane and Hoist Corporation

1234 Washington Street, Boston, MA 02118 • Website: ac-h.com • Email: sales@ac-h.com

Benchhoist Sales: 1-800-874-6478 (US Hoist)

Fax: 508-946-9056 • Web: www.benchhoist.com